

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number  
**WO 2005/047162 A1**

(51) International Patent Classification<sup>7</sup>: B66B 13/12,  
13/20

Drive, Bristol, CT 06010 (US). TERRY, Harold [GB/US];  
73 Deepwood Drive, Avon, CT 06001 (US). LEGEZ, Ja-  
cobus, Benjamin [NL/NL]; Distellaan 25, NL-1424 SC De  
Kwakel (NL).

(21) International Application Number:  
PCT/US2003/034911

(74) Agent: GASKEY, David, J.; Carlson, Gaskey & Olds, 400  
W. Maple Rd., Ste. 350, Birmingham, MI 48009 (US).

(22) International Filing Date:  
4 November 2003 (04.11.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (*for all designated States except US*): OTIS EL-  
LEVATOR COMPANY [US/US]; Ten Farm Springs Road,  
Farmington, CT 06032 (US).


(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): GALANTE, Timo-  
thy, P. [US/US]; 5 Cherryfield Drive, West Hartford, CT  
06107 (US). KULAK, Richard [US/US]; 80 Aldbourne

[Continued on next page]

(54) Title: ELEVATOR DOOR OPERATOR AND INTERLOCK ARRANGEMENT

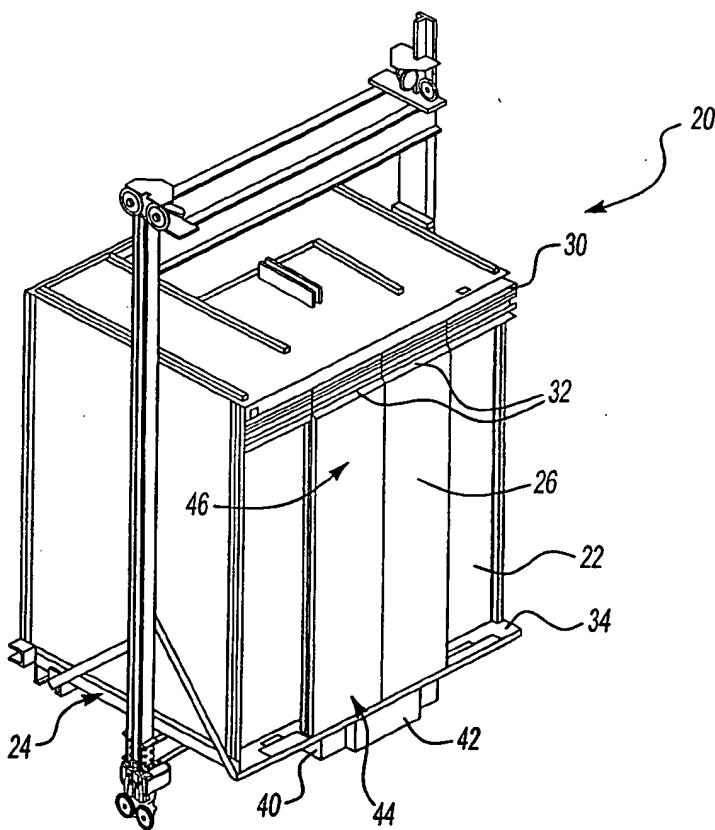

(57) Abstract: An elevator door moving arrangement includes a door mover (40) and an interlock device (42) supported near a lower edge (44) of cabin doors (26). The strategic position of the door mover (40) and the interlock device (42) minimizes the distance between the sill member (34, 78) and the operative components for moving the doors. In one example, the entire door mover assembly and the interlock are located beneath a sill member (34), which is beneath the bottom edge of the doors (26).

WO 2005/047162 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*